


GARDNERVILLE WATER COMPANY - (RP) REDUCED PRESSURE PRINCIPAL BACKFLOW PREVENTION ASSEMBLY


PLAN VIEW

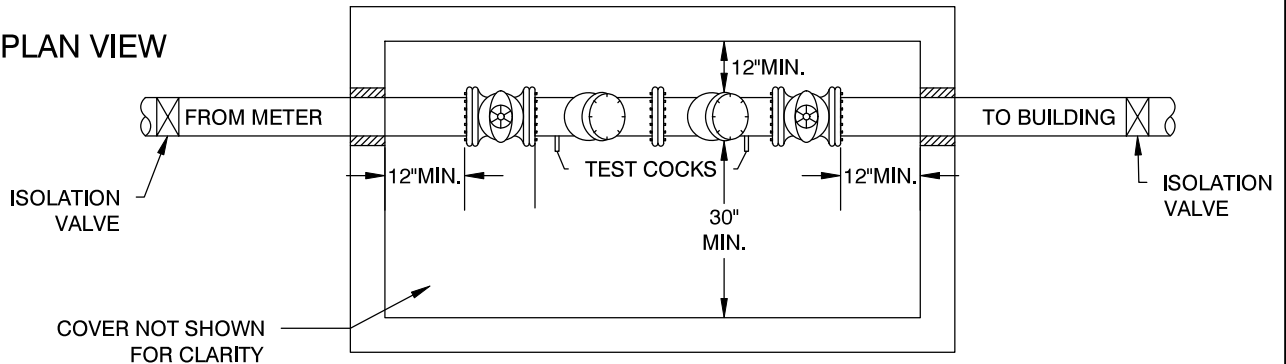

ELEVATION VIEW

ABOVE GROUND INSULATED
BOX NOT SHOWN IN DIAGRAM
FOR CLARITY

**USC APPROVED BACKFLOW
PREVENTION ASSEMBLY:**
REDUCED PRESSURE PRINCIPAL
ASSEMBLY AS APPROVED BY
THE WATER PURVEYOR

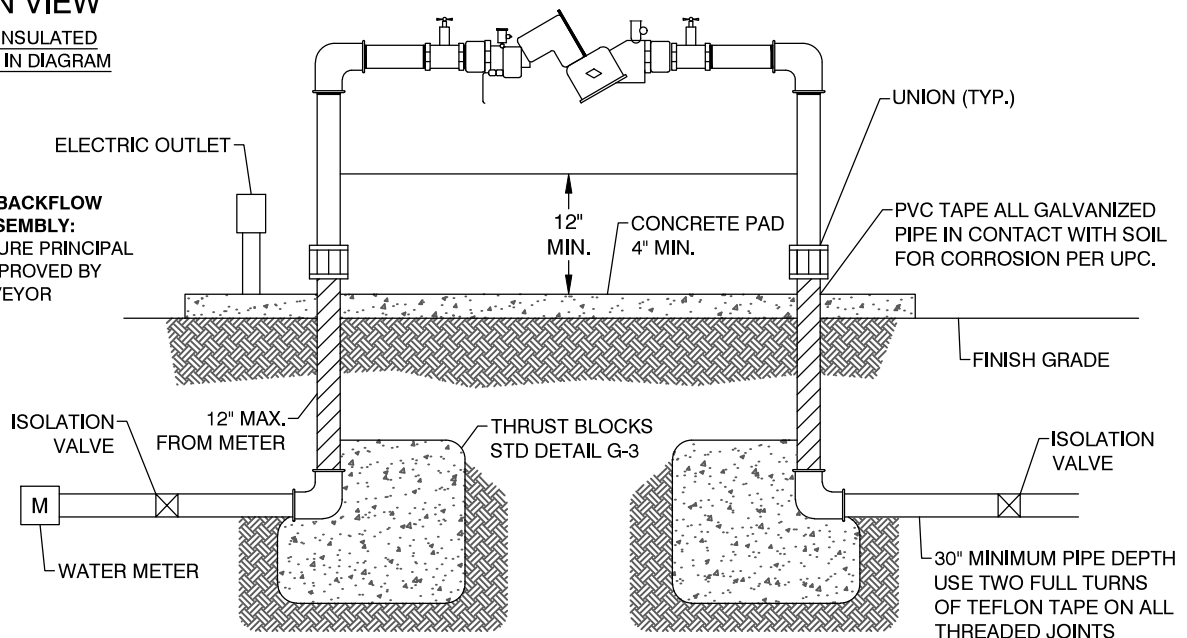

NOTES:

1. AN RP MUST BE ABOVE GRADE.
2. FREEZE PROTECTION (ABOVE GROUND INSULATED BOX OR ABOVE GROUND VAULT AND REDUNDANT HEAT TAPE) IS REQUIRED.
3. AN ABOVE GROUND INSULATED BOX OR ABOVE GROUND CONCRETE VAULT MUST BE SIZED TO PROVIDE CLEARANCES SHOWN IN PLAN VIEW. A SPRING LOADED LID IS REQUIRED ON LARGE VAULTS.
4. INSULATED BOX LID MUST SWING CLEAR OF BACKFLOW ASSEMBLY TO PROVIDE CLEARANCES IN PLAN VIEW.
5. STOP AND WASTE VALVES ARE NOT TO BE USED BETWEEN THE METER AND THE BACKFLOW PREVENTION ASSEMBLY.
6. ABOVE GROUND VAULTS AND INSULATED BOX MUST PROVIDE ADEQUATELY SIZED DAYLIGHT DRAINS AT PAD LEVEL FOR DRAINAGE.
7. ELECTRICAL SUPPLY SOCKETS MUST BE AWAY FROM WATER RELIEF PORTS AND TESTCOCKS.
8. THIS STANDARD DETAIL APPLIES TO 3/4" - 2" REDUCED PRESSURE & DOUBLE CHECK BACKFLOW PREVENTION DEVICES.

NO.	REVISION	DATE	GARDNERVILLE WATER COMPANY - STANDARD DETAIL	DRAWING NO.	
1	REVISION	05/19	REDUCED PRESSURE PRINCIPAL BACKFLOW PREVENTION ASSEMBLY (RP) TYPICAL INSTALLATION STANDARD EXTERNAL BACKFLOW PREVENTER - YEAR ROUND SERVICE	RP	
2	2022 UPDATES	09/22		DATE:	PAGE:
				09/22	16